


DUPLEX STRAINER MODEL DS

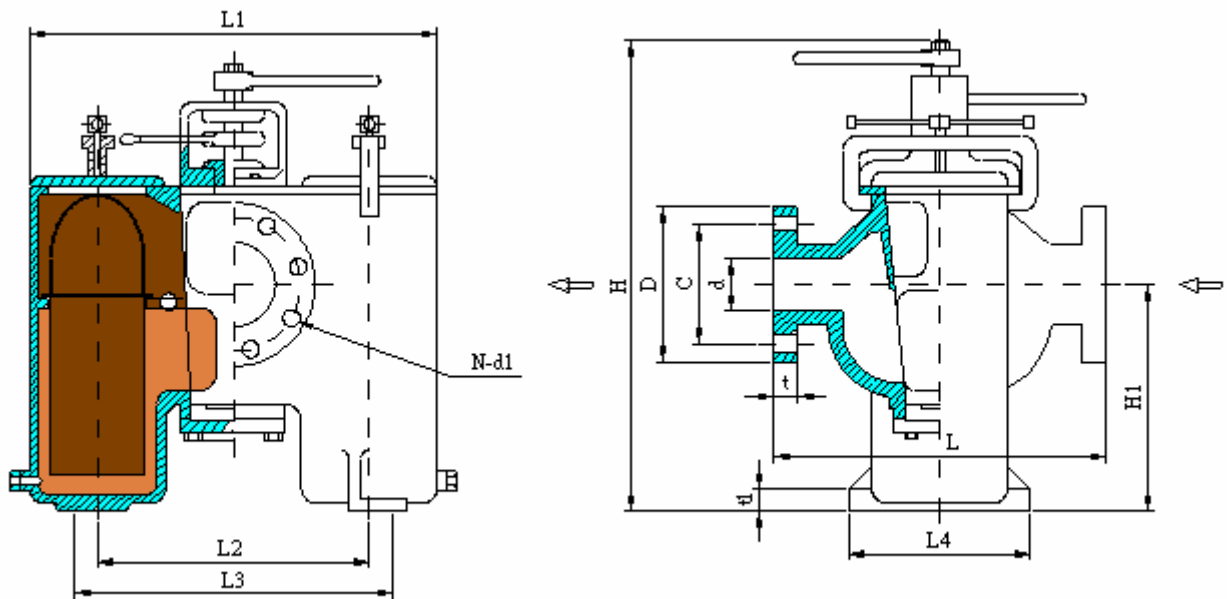

Flange ends : ANSI 125, 150LB, PN16

SIZE mm	d	L	L1	L2	L3	L4	H	H1	D	C	N	D1	D2	t	t1
20A	20	210	270	170	250	45	385	160	100	75	4	10	9.5	16	15
25A	25	210	270	170	250	45	385	160	125	90	4	10	9.5	16	15
40A	40	240	380	230	260	130	510	260	140	105	4	19	14	20	15
50A	50	280	400	255	305	155	570	280	155	120	4	19	14	20	15
65A	65	310	460	305	345	168	620	255	175	140	4	19	14	25	15
80A	80	310	460	305	345	168	670	265	185	150	4	19	14	25	15
100A	100	330	520	350	540	180	880	370	210	175	8	19	16	28	18
125A	125	480	660	430	640	140	1000	390	250	216	8	23	16	28	22
150A	150	530	680	483	680	192	1090	420	279	240	8	22	16	28	22
200A	200	560	775	495	810	350	1200	545	343	298.6	8	22	19	30	25
250A	250	960				465	1400		406	362	12	25	19	32	25

● Materials

Body	Screen
A126CL.B	SUS304 (Stainless Steel)
A216WCB	SUS304 (Stainless Steel)
A351CF8	SUS304 (Stainless Steel)
A351CF8M	SUS316 (Stainless Steel)

● Specification

Connections...ANSI125,150PN16
FF, RF
Body rating....ACC. to ANSI B16.34
Flanged.....ANSI B16.5
Butt-weld.....ANSI B16.25

● Cover seal....Max.temp. C

Nitrile.....120
Viton.....200
● Screen mesh...10,20,30,40,50,60
.etc
● Option.....Differential pressure
indicator & switch.



K-flow Engineering Co., Ltd.
6F-2, NO. 144-15, Chung Hwa Road, Yung Kang City, Tainan, Taiwan, R.O.C.
Phone: (06)-312-7891, Fax: (06)-312-1817 E-mail: kflow@seed.net.tw